




HWTT800

Date Printed : 3/29/2023


Tops Engineering

Last Saved : 3/29/2023

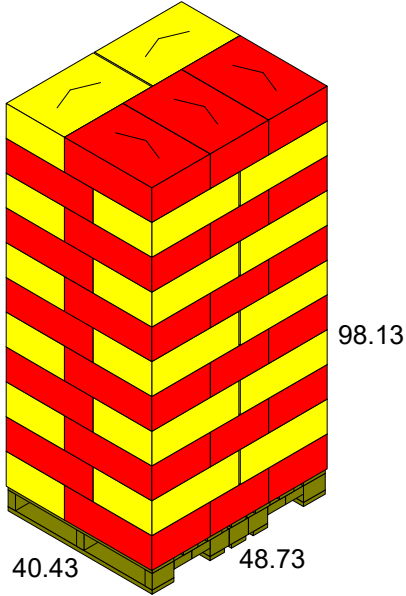

GMA (Notched) 48.00x40.00x6.00

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)
Ln:	23.875 in	24.188 in	48.73 in
Wd:	15.930 in	16.243 in	40.43 in
Ht:	7.750 in	8.375 in	98.13 in
Net:		0.00 lb	0.00 lb
Gr:		0.00 lb	65.00 lb
Cube:	1.706 ft3	1.904 ft3	111.870 ft3
Prod.Vol:	0.000 in3		0.000 ft3
Shipper:			55
Area Efficiency:		0.0 %	102.3 %
Cubic Efficiency:		0.0 %	96.2 %
Prod.Eff:	0.0 %	0.0 %	0.0 %
Cases per layer:			5
Layers/load:			11
Pattern:			Interlock
RSC Area:		13.82 ft2	760 ft2
Density (gr/cc):			0.0000
Max UL High:			4
Clamp Direction:			N/A

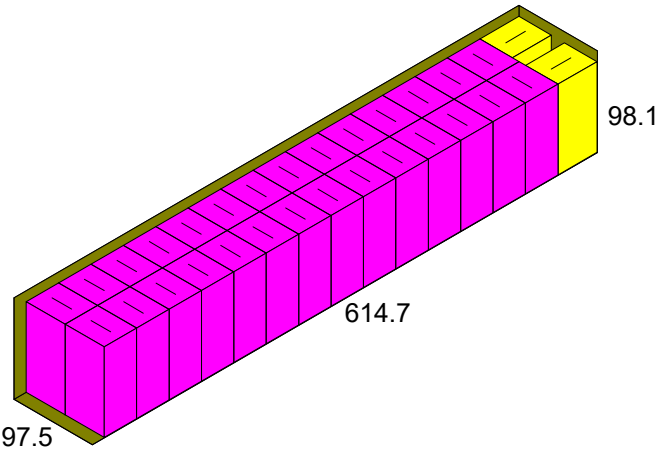

53 FT. Dry Van 630.0x98.0x110.0

	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	24.188 in	48.73 in	614.75 in
Wd:	16.243 in	40.43 in	97.5 in
Ht:	8.375 in	98.13 in	98.1 in
Net:	0.00 lb	0.00 lb	0.00 lb
Gr:	0.00 lb	65.00 lb	1950.00 lb
Cube:	1.904 ft3	111.870 ft3	33402.017 ft3
Prod.Vol:	0.000 in3	0.000 ft3	0.000 ft3
Shipper:		55	1650
UnitLoads:			30
Area Efficiency:		102.3 %	95.7 %
Cubic Efficiency:		96.2 %	85.4 %
Prod.Eff:	0.0 %	0.0 %	0.0 %
Cases per layer:		5	1650
UL per layer:			30
Layers/load:		11	1
Pattern:		Interlock	Interlock
Max UL High:		4	
Clamp Direction:		N/A	

Notes: