




CP603

Date Printed : 2/6/2017
Last Saved : 4/28/2014

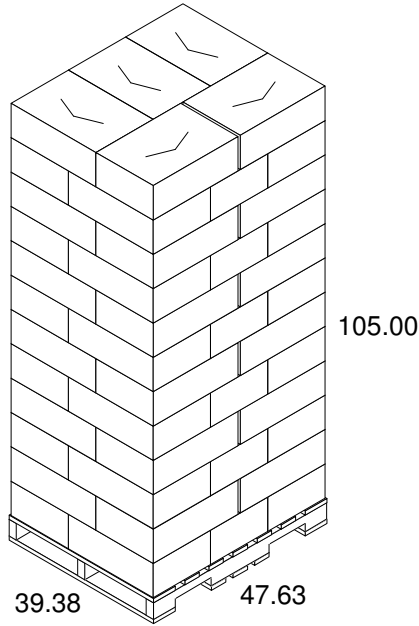


53 FT. Dry Van 630.0x98.0x110.0

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	23.250 in	23.500 in	47.63 in	608.00 in
Wd:	15.625 in	15.875 in	39.38 in	96.0 in
Ht:	7.750 in	8.250 in	105.00 in	105.0 in
Net:		0.00 lb	0.00 lb	0.00 lb
Grs:		17.02 lb	1086.20 lb	32586.00 lb
Cube:	1.629 ft3	1.781 ft3	113.947 ft3	33546.667 ft3
		Height Vert		
Shipper:			60	1800
UnitLoads:				30
Area Efficiency:		0.00 %	97.15 %	93.29 %
Cubic Efficiency:		0.00 %	92.48 %	89.05 %
Cases per layer:			5	1800
UL per layer:				30
Layers/load:			12	1
Pattern:			Interlock	Interlock
RSC Area:		13.19 ft2	792 ft2	23748 ft2
Density (gr/cc):			0.1531	0.1499

GMA (Notched) 48.00x40.00x6.00

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	23.250 in	23.500 in	47.63 in	608.00 in
Wd:	15.625 in	15.875 in	39.38 in	96.0 in
Ht:	7.750 in	8.250 in	105.00 in	105.0 in
Net:		0.00 lb	0.00 lb	0.00 lb
Grs:		17.02 lb	1086.20 lb	32586.00 lb
Cube:	1.629 ft3	1.781 ft3	113.947 ft3	33546.667 ft3
		Height Vert		
Shipper:			60	1800
UnitLoads:				30
Area Efficiency:		0.00 %	97.15 %	93.29 %
Cubic Efficiency:		0.00 %	92.48 %	89.05 %
Cases per layer:			5	1800
UL per layer:				30
Layers/load:			12	1
Pattern:			Interlock	Interlock
RSC Area:		13.19 ft2	792 ft2	23748 ft2
Density (gr/cc):			0.1531	0.1499

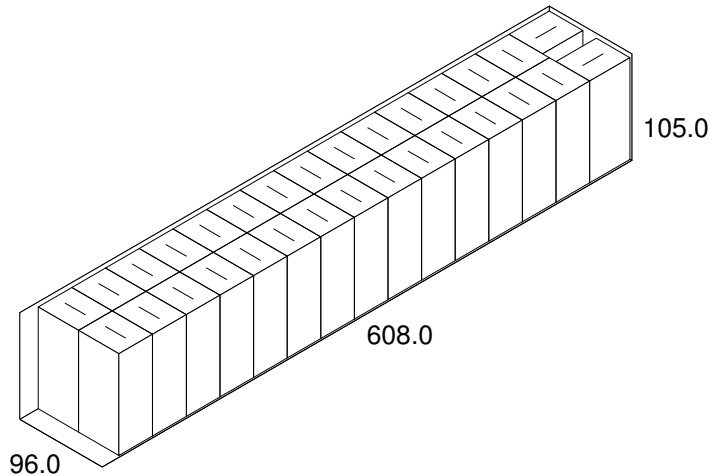

Notes: