



Tops Engineering


FT3000

Date Printed : 3/31/2023

Last Saved : 3/31/2023


GMA (Notched) 48.00x40.00x6.00

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)
Ln:	17.250 in	17.563 in	47.56 in
Wd:	9.688 in	10.000 in	37.56 in
Ht:	11.063 in	11.688 in	87.81 in
Net:		0.00 lb	0.00 lb
Grs:		0.00 lb	65.00 lb
Cube:	1.070 ft3	1.188 ft3	90.789 ft3
Prod.Vol:	0.000 in3		0.000 ft3
Shipper:			70
Area Efficiency:		0.0 %	91.5 %
Cubic Efficiency:		0.0 %	77.1 %
Prod.Eff:	0.0 %	0.0 %	0.0 %
Cases per layer:			10
Layers/load:			7
Pattern:			Diagonal
RSC Area:		8.30 ft2	581 ft2
Density (gr/cc):			0.0000
Max UL High:			4
Clamp Direction:			N/A

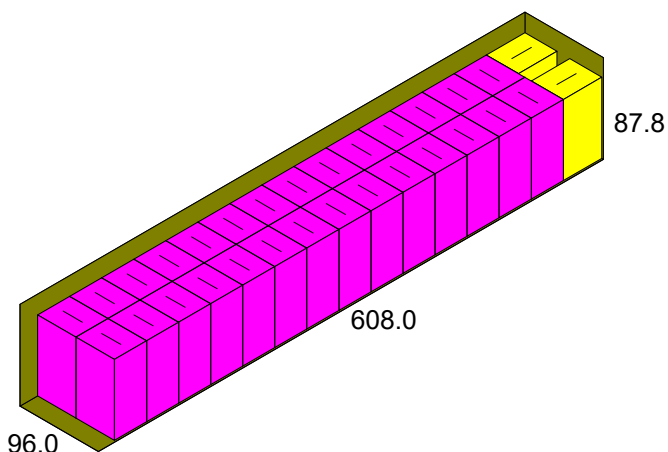

53 FT. Dry Van 630.0x98.0x110.0

	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	17.563 in	47.56 in	608.00 in
Wd:	10.000 in	37.56 in	96.0 in
Ht:	11.688 in	87.81 in	87.8 in
Net:	0.00 lb	0.00 lb	0.00 lb
Grs:	0.00 lb	65.00 lb	1950.00 lb
Cube:	1.188 ft3	90.789 ft3	2966.111 ft3
Prod.Vol:	0.000 in3	0.000 ft3	0.000 ft3
Shipper:		70	2100
UnitLoads:			30
Area Efficiency:		91.5 %	93.3 %
Cubic Efficiency:		77.1 %	74.5 %
Prod.Eff:	0.0 %	0.0 %	0.0 %
Cases per layer:		10	2100
UL per layer:			30
Layers/load:		7	1
Pattern:		Diagonal	Interlock
Max UL High:		4	
Clamp Direction:		N/A	

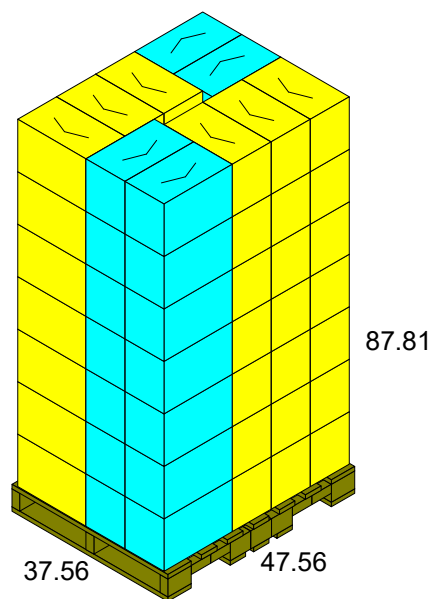

Notes: