




HHT085

Date Printed : 2/7/2018
Last Saved : 2/7/2018

Tops Engineering

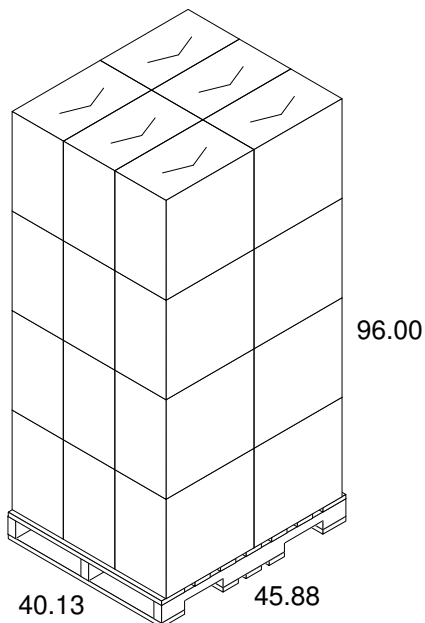


53 FT. Dry Van 630.0x98.0x110.0

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	22.625 in	22.938 in	45.88 in	609.75 in
Wd:	13.063 in	13.375 in	40.13 in	96.0 in
Ht:	21.875 in	22.500 in	96.00 in	96.0 in
Net:		0.00 lb	0.00 lb	0.00 lb
Grs:		0.00 lb	65.00 lb	1950.00 lb
Cube:	3.741 ft3	3.995 ft3	102.263 ft3	33252.000 ft3
		Height Vert		
Shipper:			24	720
UnitLoads:				30
Area Efficiency:		0.00 %	95.87 %	93.59 %
Cubic Efficiency:		0.00 %	86.28 %	81.68 %
Cases per layer:			6	720
UL per layer:				30
Layers/load:			4	1
Pattern:			Column	Interlock
RSC Area:		18.09 ft2	434 ft2	13027 ft2
Density (gr/cc):			0.0000	0.0000

GMA (Notched) 48.00x40.00x6.00

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	22.625 in	22.938 in	45.88 in	609.75 in
Wd:	13.063 in	13.375 in	40.13 in	96.0 in
Ht:	21.875 in	22.500 in	96.00 in	96.0 in
Net:		0.00 lb	0.00 lb	0.00 lb
Grs:		0.00 lb	65.00 lb	1950.00 lb
Cube:	3.741 ft3	3.995 ft3	102.263 ft3	33252.000 ft3
		Height Vert		
Shipper:			24	720
UnitLoads:				30
Area Efficiency:		0.00 %	95.87 %	93.59 %
Cubic Efficiency:		0.00 %	86.28 %	81.68 %
Cases per layer:			6	720
UL per layer:				30
Layers/load:			4	1
Pattern:			Column	Interlock
RSC Area:		18.09 ft2	434 ft2	13027 ft2
Density (gr/cc):			0.0000	0.0000

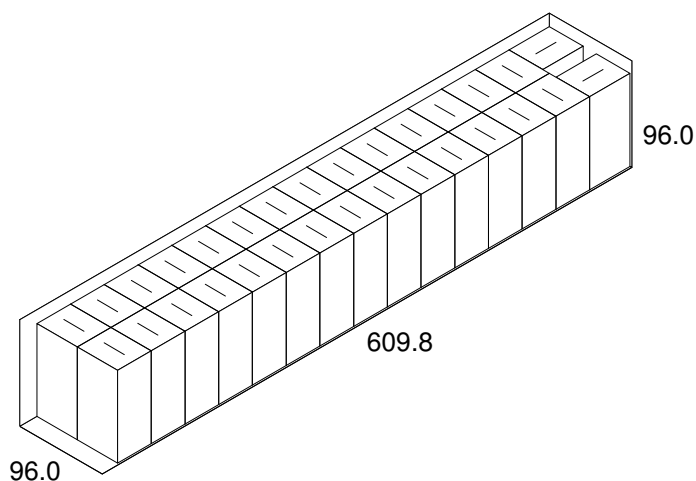

Notes: