





53 ft. Dry Van 630.0x98.0x110.0

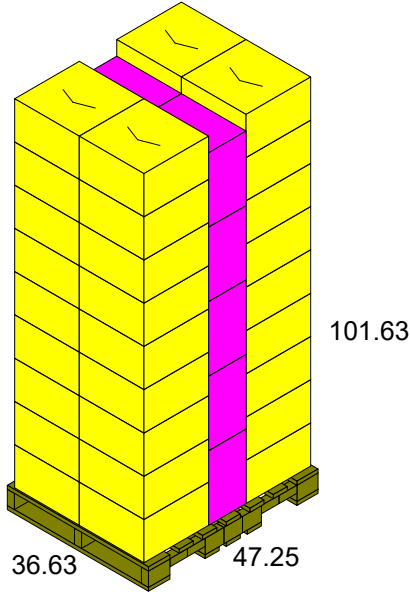

	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	18.313 in	47.25 in	608.00 in
Wd:	18.313 in	36.63 in	96.0 in
Ht:	10.625 in	101.63 in	101.6 in
Net:	0.00 lb	0.00 lb	0.00 lb
Grs:	21.30 lb	1044.80 lb	31344.00 lb
Cube:	2.062 ft3	101.774 ft3	33432.667 ft3
Soldiered			
Prod.Vol:	0.000 in3	0.000 ft3	0.000 ft3
Shipper:		46	1380
UnitLoads:			30
Area Efficiency:		90.1 %	93.3 %
Cubic Efficiency:		82.1 %	86.2 %
Prod.Eff:	0.0 %	0.0 %	0.0 %
Cases per layer:		4	1380
UL per layer:			30
Layers/load:		9	1
Pattern:		Soldiered	Interlock
Max UL High:		4	
Clamp Direction:		N/A	

GMA (Notched) 48.00x40.00x6.00

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)
Ln:	18.000 in	18.313 in	47.25 in
Wd:	18.000 in	18.313 in	36.63 in
Ht:	10.000 in	10.625 in	101.63 in
Net:		0.00 lb	0.00 lb
Grs:		21.30 lb	1044.80 lb
Cube:	1.875 ft3	2.062 ft3	101.774 ft3
Soldiered			
Prod.Vol:	0.000 in3		0.000 ft3
Shipper:			46
Area Efficiency:		0.0 %	90.1 %
Cubic Efficiency:		0.0 %	82.1 %
Prod.Eff:	0.0 %	0.0 %	0.0 %
Cases per layer:			4
Layers/load:			9
Pattern:			Soldiered
RSC Area:		14.72 ft2	677 ft2
Density (gr/cc):			0.1655
Max UL High:			4
Clamp Direction:			N/A

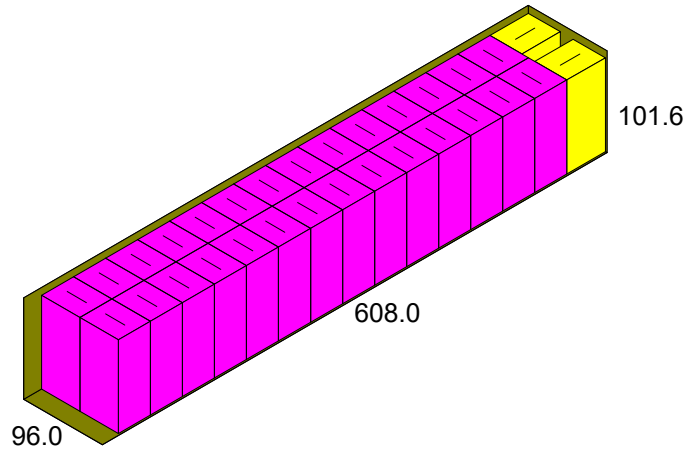

Notes: