




MF102

Date Printed : 2/6/2017
Last Saved : 8/2/2016

Tops Engineering

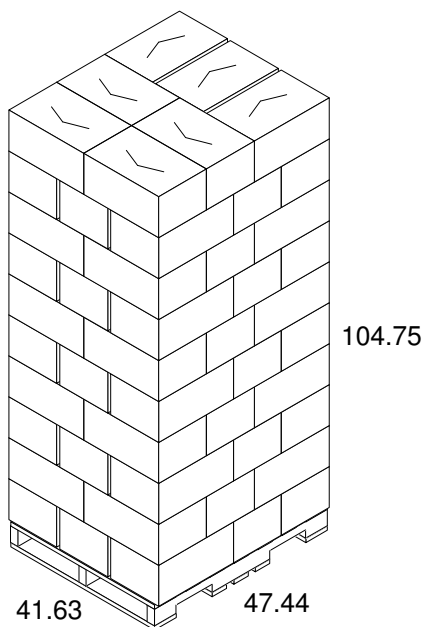


53 ft. Dry Van 636.0x98.0x110.0

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	20.500 in	20.813 in	47.44 in	624.38 in
Wd:	13.000 in	13.313 in	41.63 in	96.0 in
Ht:	9.250 in	9.875 in	104.75 in	104.8 in
Net:		0.00 lb	0.00 lb	0.00 lb
Grs:		17.27 lb	1273.90 lb	38217.00 lb
Cube:	1.427 ft3	1.583 ft3	119.698 ft3	33633.516 ft3
		Height Vert		
Shipper:			70	2100
UnitLoads:				30
Area Efficiency:		0.00 %	101.01 %	96.17 %
Cubic Efficiency:		0.00 %	95.91 %	91.58 %
Cases per layer:			7	2100
UL per layer:				30
Layers/load:			10	1
Pattern:			Interlock	Column
RSC Area:		10.99 ft2	769 ft2	23079 ft2
Density (gr/cc):			0.1747	0.1711

GMA (Notched) 48.00x40.00x6.00

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	20.500 in	20.813 in	47.44 in	624.38 in
Wd:	13.000 in	13.313 in	41.63 in	96.0 in
Ht:	9.250 in	9.875 in	104.75 in	104.8 in
Net:		0.00 lb	0.00 lb	0.00 lb
Grs:		17.27 lb	1273.90 lb	38217.00 lb
Cube:	1.427 ft3	1.583 ft3	119.698 ft3	33633.516 ft3
		Height Vert		
Shipper:			70	2100
UnitLoads:				30
Area Efficiency:		0.00 %	101.01 %	96.17 %
Cubic Efficiency:		0.00 %	95.91 %	91.58 %
Cases per layer:			7	2100
UL per layer:				30
Layers/load:			10	1
Pattern:			Interlock	Column
RSC Area:		10.99 ft2	769 ft2	23079 ft2
Density (gr/cc):			0.1747	0.1711

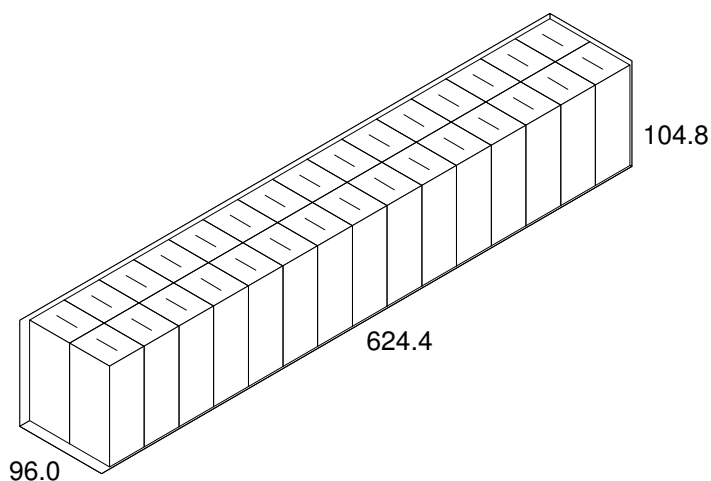

Notes: