




Tops Engineering

HWTK950

Date Printed : 9/30/2026

Last Saved : 7/2/2025

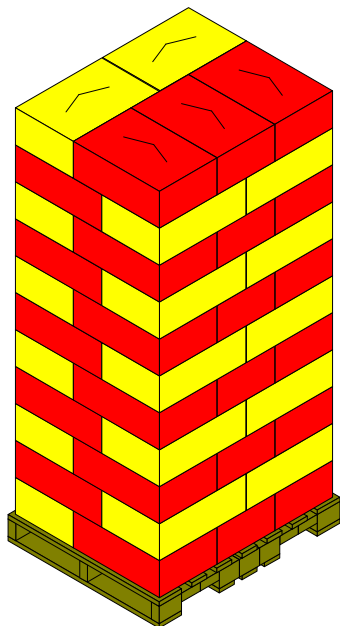


53 ft. Dry Van 630.0x98.0x110.0

	Shipper (OD)	UnitLoad (Incl. Pal)	Vehicle Load
Ln:	22.875 in	45.94 in	608.00 in
Wd:	15.312 in	38.19 in	96.0 in
Ht:	8.500 in	99.50 in	99.5 in
Net:	0.00 lb	0.00 lb	0.00 lb
Grs:	21.83 lb	1265.65 lb	37969.50 lb
Cube:	1.723 ft3	101.012 ft3	33360.889 ft3
Height Vert			
Prod.Vol:	0.000 in3	0.000 ft3	0.000 ft3
Shipper:		55	1650
UnitLoads:			30
Area Efficiency:		91.2 %	93.3 %
Cubic Efficiency:		86.2 %	84.4 %
Prod.Eff:	0.0 %	0.0 %	0.0 %
Cases per layer:		5	1650
UL per layer:			30
Layers/load:		11	1
Pattern:		Interlock	Interlock
Max UL High:		4	
Clamp Direction:		N/A	

GMA (Notched) 48.00x40.00x6.00

	Shipper (ID)	Shipper (OD)	UnitLoad (Incl. Pal)
Ln:	22.563 in	22.875 in	45.94 in
Wd:	15.000 in	15.312 in	38.19 in
Ht:	7.875 in	8.500 in	99.50 in
Net:		0.00 lb	0.00 lb
Grs:		21.83 lb	1265.65 lb
Cube:	1.542 ft3	1.723 ft3	101.012 ft3
Height Vert			
Prod.Vol:	0.000 in3		0.000 ft3
Shipper:			55
Area Efficiency:		0.0 %	91.2 %
Cubic Efficiency:		0.0 %	86.2 %
Prod.Eff:	0.0 %	0.0 %	0.0 %
Cases per layer:			5
Layers/load:			11
Pattern:			Interlock
RSC Area:		12.63 ft2	695 ft2
Density (gr/cc):			0.2029
Max UL High:			4
Clamp Direction:			N/A

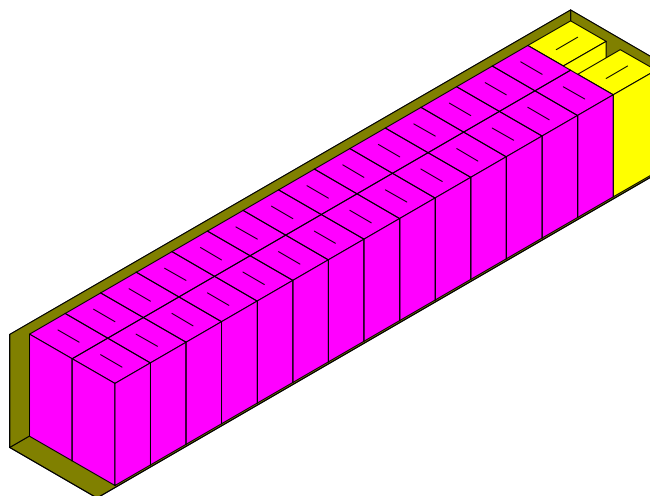

Notes: